


**Notes:**  
 1) Proposed pipework shall be ductile iron Class K9 cement lined pipework and fittings with a factory applied cement sealant.  
 2) All valves and fittings shall be PN16 rated.  
 3) Thrust blocks shall be located at all vertical and horizontal changes in direction of 22.5° or greater.  
 4) The fire hydrant location and number shall be agreed with the Fire Office during the Fire Certificate stage. Shown here indicatively only.

5) The proposed bulk water meter specification shall conform to Irish Water requirements.  
 6) Reproduced from the Ordnance Survey by permission of the Government, licence No. EN 0002815.



PL1	11/12/15	J.B.	J.B.	JMacC
Issued for Planning				
Rev	Date	By	Chkd	Appd

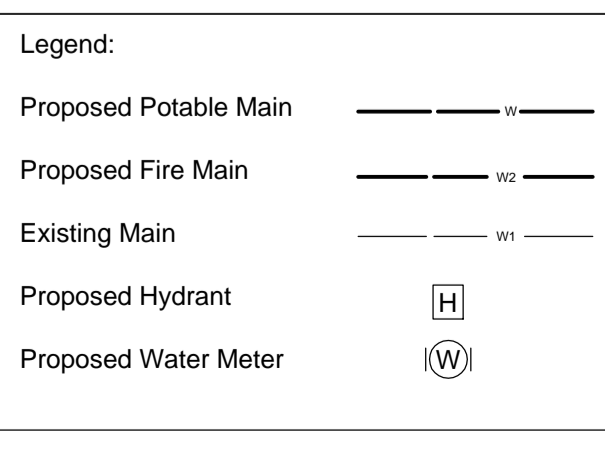

Client  
 Ringaskiddy Resource Recovery Centre

Project Title  
 Proposed Potable & Fire Main Layout

Scale at A1	1:500
Role	Site Infrastructure
Sustainability	Planning
Arup Job No	238129-00
Name	C-000-031
Rev	PL1